D08 Subplate with Relief - Nominal 1-1/4”

SPRP_08GSPSIUGE

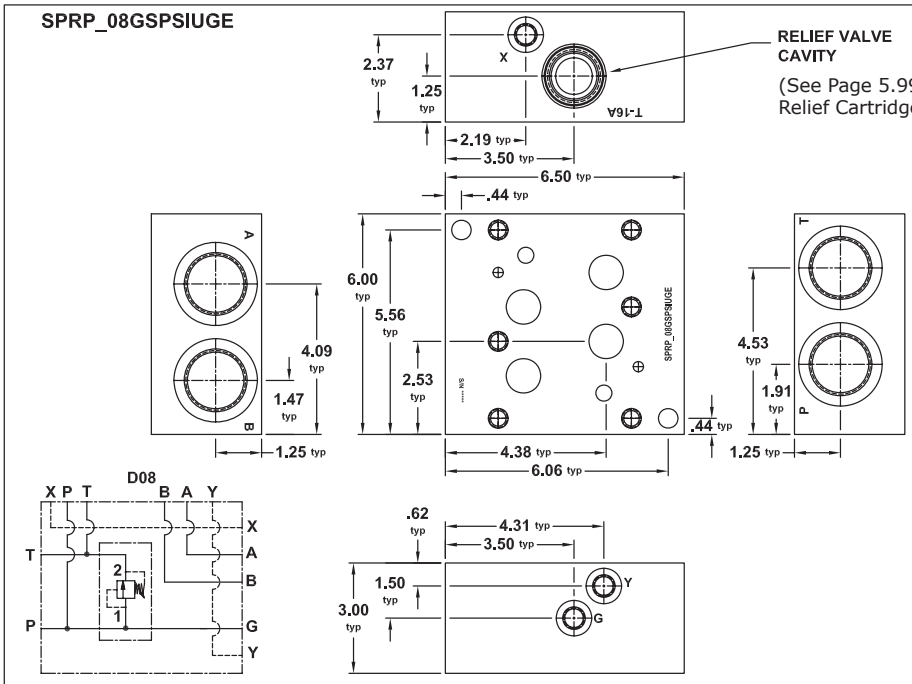

Mounting Kits include the following:

"SP" UNC Kit:
2 - 1/2"-13 x 4.00" SHCS
"SP" Metric Kit:
2- M12-1.75 x 100 mm SHCS

"SB" UNC Kit:
2 - 1/2"-13 x 4.00" SHCS
2 - plugs
"SB" Metric Kit:
2- M12-1.75 x 100 mm SHCS
2 - plugs

"ST" UNC Kit:
2 - 1/2"-13 x 4.00" SHCS
"ST" Metric Kit:
2- M12-1.75 x 100 mm SHCS

SPRP_08GSBSIUGE - BOTTOM VIEW

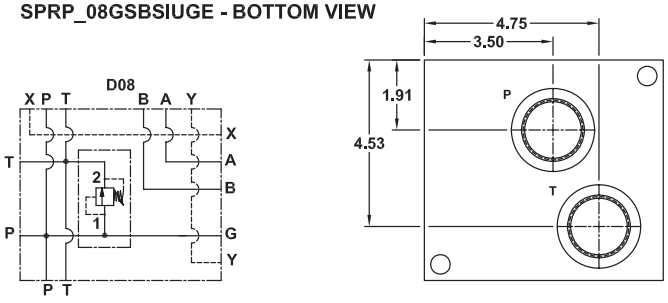

SPRP_08GSTSIUGE - BOTTOM VIEW

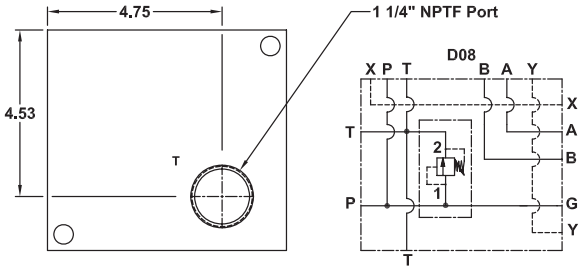

PART NUMBER SYSTEM

Aluminum D08 Side Ported Subplate with SAE 20 Ports & T-16A Relief Example: **SPRPA08GSPSIUGE**

TYPE	MATERIAL	VALVE PATTERN	PORTING STYLE	PORT CODE	MOUNTING THREADS & KIT	RELIEF CAVITY AND PILOT PORT OPTIONS

TYPE

SPRP	Subplates with P to T Relief

MATERIAL

A	Aluminum
D	Ductile Iron

VALVE PATTERN

08G	ISO 4401-08-07 NFPA T3.5.1-D08

PORTING STYLE

SB	Side Ported with Bottom P & T Ports
SP	Side Ported only
ST	Side Ported with 1 1/4" NPTF "T" Port on Bottom only

PORT CODE

CODE	TYPE	P, T, A and B	X & Y	G
SI	SAE	20	6	6
NI	NPTF	1 1/4"	3/8"	1/4"
BI	BSPP	1 1/4"	3/8"	1/4"
TI	BSPT	1 1/4"	3/8"	1/4"
MI	METRIC	M42	M14	M10

MOUNTING THREADS & KIT

U	UNC Std for SAE & NPT	D08 Valve	1/2"-13 UNC x 1.25" dp
		Subplate	1/2"-13 SHCS
M	Metric Std for BSP* & Metric	D08 Valve	M12 x 1.75 x 1.25" dp
		Subplate	M12 x 1.75 SHCS

RELIEF CAVITY AND PILOT PORT OPTIONS

GE	Sun T-16A
HE	Common C16-2

WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION