

Index

Technical Information

Material Properties.....	11.01.01
<i>Solenoid Valve Interfaces</i>	
ISO02, ISO03, ISO05, ISO05 w/X&Y U.S.....	11.02.01
ISO05 w/X&Y European, ISO07 w/X&Y, ISO08 w/X&Y, ISO10 w/X&Y.....	11.02.02
ISO 6162 (SAE) Flange Specifications.....	11.03.01
General Port Specifications	11.03.02

WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION

Lynch Products Can Be Modified to Suit Your Application

Phone: 1 (888) 626-4365 or + 1 (905) 363-2400 Fax: 1 (800) 263-5807 www.lynch.ca sales@lynch.ca

Material Properties

Bar Manifolds and Accessories are offered in the following standard materials;
6061-T6 Aluminum, 65-45-12 Continuous Cast Ductile Iron and C12L14 free machining steel.

Other materials such as Stainless Steel, Mild Steel, Brass, and Plastic are available upon request.
Below, are the properties of the standard materials:

For its aluminum bodies, a 6000 series aluminum alloy that offers high strength characteristics and good corrosion resistance in the finished product is used. The mechanical properties of grade 6061-T6 aluminum are:

ALUMINUM PROPERTIES PROPERTIES	ASTM B-221 ** Grade 6061-T6
Tensile Strength	45,000 PSI
Yield Strength	40,000 PSI
Elongation, %	12%
Brinell Hardness Range	95
ASTM Specification	B-221

**Above material is rated at 3000 psi max, depending on duty cycle and design parameters.

We use a ductile iron that offers high tensile strength and good ductility for its iron bodies. All ductile iron bodies use iron produced by the continuous cast method which provides a body that possesses a dense, homogeneous structure with minimal inclusions for high pressure integrity. The mechanical properties of grade 65-45-12 ductile iron are:

DUCTILE IRON PROPERTIES	ASTM A-536 ** Grade 65-45-12
Tensile Strength	65,000 PSI
Yield Strength	45,000 PSI
Elongation, %	12%
Brinell Hardness Range	131/220
ASTM Specification	A-536

**Above material is rated at 5000 psi max, depending on duty cycle and design parameters.

Where applicable, a free machining grade of steel is used on select bodies. The mechanical properties of this material are equal to or greater than ductile iron. The mechanical properties of grade C12L14 are:

FREE MACHINING STEEL PROPERTIES	ASTM A-108 ** Grade C12L14
Tensile Strength	78,000 PSI
Yield Strength	70,000 PSI
Elongation, %	15%
Brinell Hardness Range	163
ASTM Specification	A-108

**Above material is rated at 5000 psi max, depending on duty cycle and design parameters.

THIS DATA IS FOR REFERENCE ONLY. CONSULT THE APPROPRIATE STANDARDS FOR CRITICAL DIMENSIONS AND RATINGS.

WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION


Lynch Products Can Be Modified to Suit Your Application

Phone: 1 (888) 626-4365 or +1 (905) 363-2400 Fax: 1 (800) 263-5807 www.lynch.ca sales@lynch.ca

Solenoid Valve Interfaces


ISO 02 | NFPA D02

Valve Models
Wandfluh WD

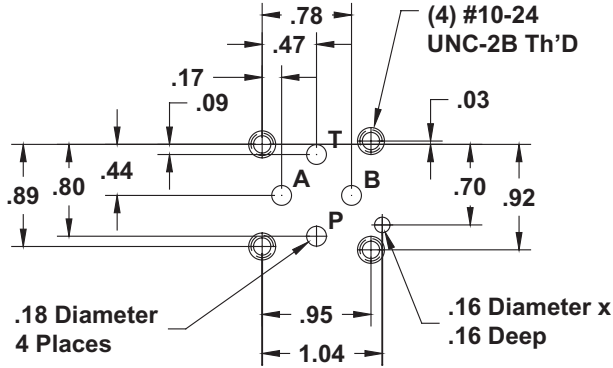


ISO 03 | NFPA D03

Valve Models
Continental VS5M, ED03M
Delta Series 4000
Denison A-3D01, D2D02-35
Double A Q* - 3
Parker Hannifin D1VW
Racine .25"
Rexroth WE6, 4WRA6
Rivett 65**-.03
Rucker/Yuken DSGR-01
Vickers DG4V
Nachi SSG01
Racine-Bosch NG6

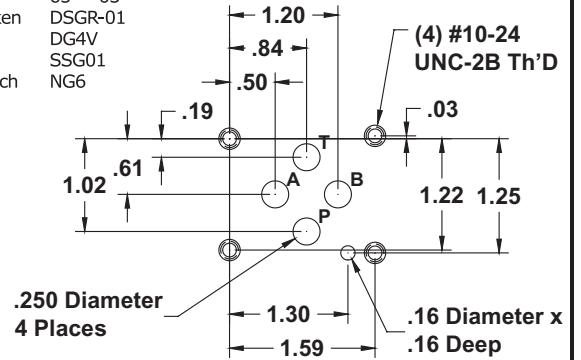


ISO 05 | NFPA D05

Valve Models
Continental VS12M, ED05M
Denison DID04, 3D02, A-D2D04
Double A Q* - 5
Parker Hannifin D3W
Racine .25"
Rexroth WE8, WE10
Rivett 65**-.02
Rucker/Yuken DSG-03
Vickers DG4S4
Nachi SSG03, E10, E20
Racine-Bosch NG10

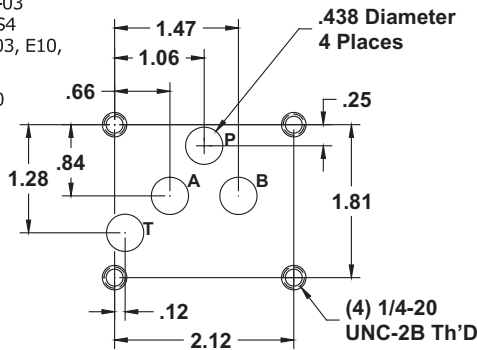

ISO 05 | D05 with X and Y U.S.

Valve Models
Double A Q* - 02H
Parker Hannifin D31VW
Racine FD4-**HS-*.02
Rivett 6600-02H
Racine-Bosch NG10

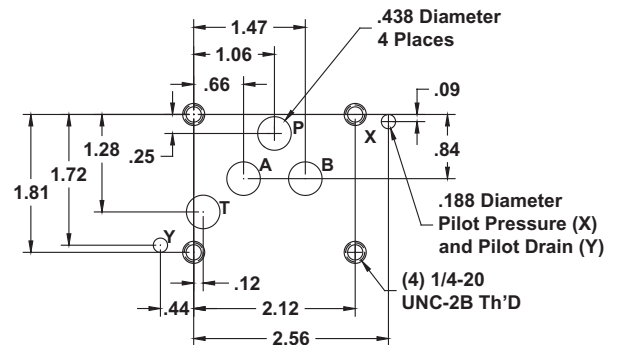

THIS DATA IS FOR REFERENCE ONLY. CONSULT THE APPROPRIATE STANDARDS FOR CRITICAL DIMENSIONS AND RATINGS.

WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION

Lynch Products Can Be Modified to Suit Your Application


Phone: 1 (888) 626-4365 or +1 (905) 363-2400 Fax: 1 (800) 263-5807 www.lynch.ca sales@lynch.ca

Solenoid Valve Interfaces

ISO 05 / D05 with X and Y European

Valve Models
Rexroth


WEH10

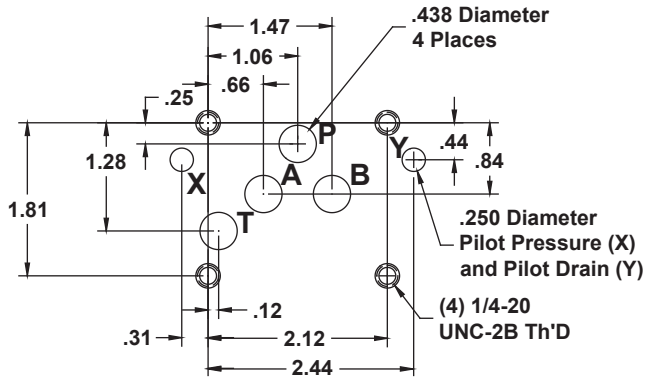

ISO 07 / NFPA D07 with X and Y

Valve Models


Denison A-3D03
Rexroth WEH16
Rucker/Yuken DSHG-04
Vickers DG5S4-04

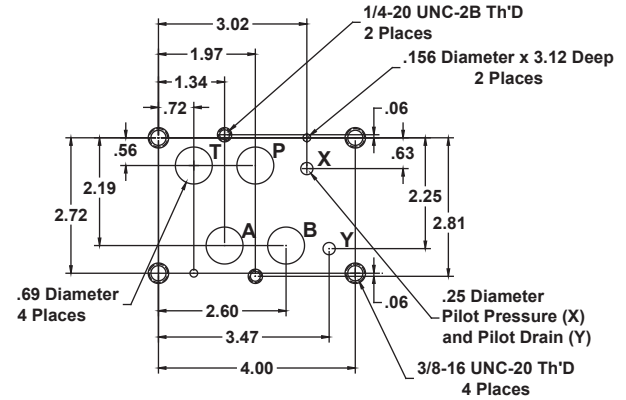

ISO 08 / NFPA D08 with X and Y

Valve Models


Continental VS35M, VA35M, DVS35M
Denison A-3D06, DID12
Double A Q* - 06
Parker Hannifin D61VW, D63W
Racine FD4-(A or B) *HS-*06
Rexroth WEH22
Rivett 6600-06
Rucker/Yuken DSGH-06
Vickers DG5S4-06(H)
Webster 12V

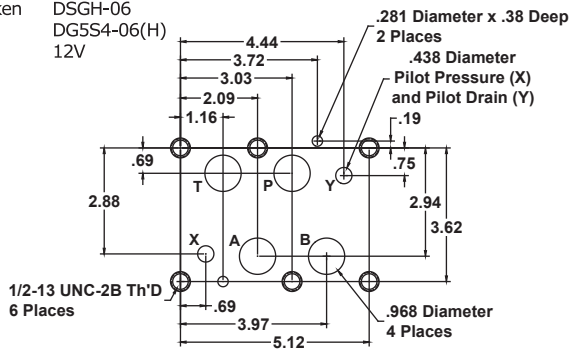

ISO 10 / NFPA D10 with X and Y

Valve Models

Denison A-3D10
Parker Hannifin D10, D101VW
Rexroth WEH 32
Vickers DG5S4-10

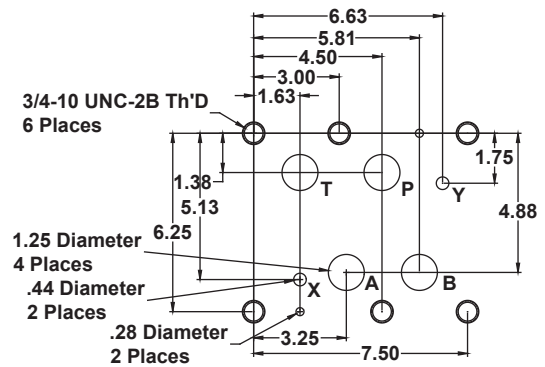

THIS DATA IS FOR REFERENCE ONLY. CONSULT THE APPROPRIATE STANDARDS FOR CRITICAL DIMENSIONS AND RATINGS.


WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION

Lynch Products Can Be Modified to Suit Your Application

Phone: 1 (888) 626-4365 or +1 (905) 363-2400 Fax: 1 (800) 263-5807 www.lynch.ca sales@lynch.ca

ISO 6162 (SAE) Flange Pattern Specifications

2.5 to 35 Mpa Series (SAE Code 61)				
Nominal Flange Size		Maximum Recommended Working Press.	O-Ring Size	O-Ring O.D.
1/2"	13 mm	5000 psi	210	1.000
3/4"	19 mm	5000 psi	214	1.250
1"	25 mm	5000 psi	219	1.562
1 1/4"	32 mm	3625 psi	222	1.750
1 1/2"	38 mm	2900 psi	225	2.125
2"	51 mm	2900 psi	228	2.500
2 1/2"	64mm	2320 psi	232	3.000
3"	76mm	1450 psi	237	3.625
3 1/2"	89mm	360 psi	241	4.125
4"	102mm	360 psi	245	4.625
5"	127mm	360 psi	253	5.625

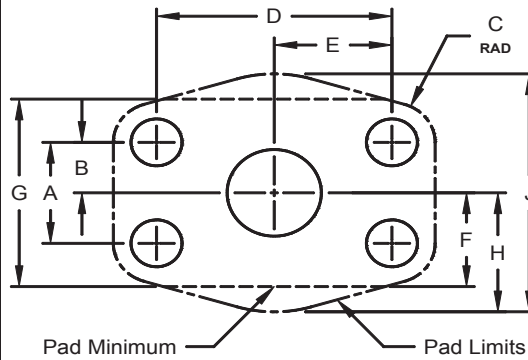

40 Mpa Series (SAE Code 62)				
Nominal Flange Size		Maximum Recommended Working Press.	O-Ring Size	O-Ring O.D.
1/2"	13 mm	5800 psi	210	1.000
3/4"	19 mm	5800 psi	214	1.250
1"	25 mm	5800 psi	219	1.562
1 1/4"	32 mm	5800 psi	222	1.750
1 1/2"	38 mm	5800 psi	225	2.125
2"	51 mm	5800 psi	228	2.500
2 1/2" (+)	64mm	Contact Mfr	232	3.000
3" (+)	76mm	Contact Mfr	237	3.625

NOTE:
(+) = NOT A RECOMMENDED PORT since this is an Industry Standard not an ISO or SAE Standard

This specification permits operation of the port up to the pressures noted. Some flanges that match these ports may be rated for lower operating pressures or limited by the mating materials.

Please consult the data from the flange manufacturers for specific operational pressures allowed.

2.5 to 34.5 Mpa Series (SAE Code 61)										40 Mpa Series (SAE Code 62)									
Four-Bolt Flange Pattern										Four-Bolt Flange Pattern									
Nominal Size	A	B	C	D	E	F	G	H	J	Nominal Size	A	B	C	D	E	F	G	H	J
	+/- .010			+/- .010					+/- .010		+/- .010			+/- .010					+/- .010
0.50	0.688	0.344	0.312	1.500	0.750	0.656	1.312	0.906	1.812	0.50	0.719	0.360	0.312	1.594	0.797	0.750	1.500	0.938	1.875
0.75	0.875	0.438	0.344	1.875	0.938	0.813	1.625	1.031	2.062	0.75	0.938	0.469	0.406	2.000	1.000	0.938	1.875	1.188	2.375
1.00	1.031	0.516	0.344	2.062	1.031	0.938	1.875	1.156	2.312	1.00	1.094	0.547	0.469	2.250	1.125	1.062	2.125	1.375	2.750
1.25	1.188	0.594	0.406	2.312	1.156	1.063	2.125	1.438	2.875	1.25	1.250	0.625	0.562	2.625	1.312	1.188	2.375	1.531	3.062
1.50	1.406	0.703	0.469	2.750	1.375	1.250	2.500	1.625	3.250	1.50	1.438	0.719	0.656	3.125	1.562	1.375	2.750	1.875	3.750
2.00	1.688	0.844	0.469	3.062	1.531	1.500	3.000	1.906	3.812	2.00	1.750	0.875	0.719	3.812	1.906	1.688	3.375	2.250	4.500
2.50	2.000	1.000	0.500	3.500	1.750	1.750	3.500	2.109	4.218	2.50 (+)	2.312	1.156	1.000	4.875	2.438	2.188	4.375	2.938	5.875
3.00	2.438	1.219	0.562	4.188	2.094	2.094	4.188	2.578	5.156	3.00 (+)	2.812	1.406	1.250	6.000	3.000	2.688	5.375	3.500	7.000
3.50	2.750	1.375	0.625	4.750	2.375	2.344	4.688	2.750	5.500										
4.00	3.062	1.531	0.625	5.125	2.563	2.594	5.188	3.000	6.000										
5.00	3.625	1.813	0.625	6.000	3.000	3.094	6.188	3.563	7.125										

ISO 6162 Type I - Metric Mounting Dimensions				
Nominal Size	Thru Hole Diameter	Mounting Thread	Mtg. Thread Depth (min)*	Counterbore Diameter
0.50	0.344	M 8x1.25-6H	0.938 / (0.492)	0.562
0.75	0.422	M10x1.50-6H	0.875 / (0.650)	0.688
1.00	0.422	M10x1.50-6H	0.875 / (0.571)	0.688
1.25	0.422	M10x1.50-6H	1.125 / (0.650)	0.688
1.50	0.500	M12x1.75-6H	1.062 / (0.768)	0.750
2.00	0.500	M12x1.75-6H	1.062 / (0.768)	0.750
2.50	0.500	M12x1.75-6H	1.188 / (0.846)	0.750
3.00	0.656	M16x2.00-6H	1.188 / (1.122)	1.000
3.50	0.656	M16x2.00-6H	1.312 / (1.122)	1.000
4.00	0.656	M16x2.00-6H	1.188 / (1.004)	1.000
5.00	0.656	M16x2.00-6H	1.312 / (1.083)	1.000

ISO 6162 Type I - Metric Mounting Dimensions				
Nominal Size	Thru Hole Diameter	Mounting Thread	Mtg. Thread Depth (min)*	Counterbore Diameter
0.50	0.344	M 8x1.25-6H	0.812 / (0.571)	0.562
0.75	0.422	M10x1.50-6H	0.938 / (0.650)	0.688
1.00	0.500	M12x1.75-6H	1.062 / (0.846)	0.750
1.25	0.500	M12x1.75-6H	1.000 / (0.728)	0.750
1.50	0.656	M16x2.00-6H	1.375 / (1.004)	1.000
2.00	0.812	M20x2.50-6H	1.500 / (1.319)	1.250
2.50				
3.00				

* = Design Depth per SAE J518 / (ISO 6162 Depth)

* = Design Depth per SAE J518 / (ISO 6162 Depth)

SAE J518 / ISO 6162 Type II - Inch Mounting Dimensions				
Nominal Size	Thru Hole Diameter	Mounting Thread	Mtg. Thread Depth	Counterbore Diameter
0.50	0.344	5/16-18 UNC-2B	0.938	0.500
0.75	0.406	3/8-16 UNC-2B	0.875	0.594
1.00	0.406	3/8-16 UNC-2B	0.875	0.594
1.25	0.469	7/16-14 UNC-2B	1.125	0.688
1.50	0.531	1/2-13 UNC-2B	1.062	0.781
2.00	0.531	1/2-13 UNC-2B	1.062	0.781
2.50	0.531	1/2-13 UNC-2B	1.188	0.781
3.00	0.656	5/8-11 UNC-2B	1.188	0.969
3.50	0.656	5/8-11 UNC-2B	1.312	0.969
4.00	0.656	5/8-11 UNC-2B	1.188	0.969
5.00	0.656	5/8-11 UNC-2B	1.312	0.969

SAE J518 / ISO 6162 Type II - Inch Mounting Dimensions				
Nominal Size	Thru Hole Diameter	Mounting Thread	Mtg. Thread Depth	Counterbore Diameter
0.50	0.344	5/16-18 UNC-2B	0.812	0.500
0.75	0.406	3/8-16 UNC-2B	0.938	0.590
1.00	0.469	7/16-14 UNC-2B	1.062	0.688
1.25	0.531	1/2-13 UNC-2B	1.000	0.781
1.50	0.656	5/8-11 UNC-2B	1.375	0.969
2.00	0.781	3/4-10 UNC-2B	1.500	1.188
2.50 (+)	0.906	7/8-9 UNC-2B	1.812	1.375
3.00 (+)	1.188	1 1/8-7 UNC-2B	2.312	1.750

THIS DATA IS FOR REFERENCE ONLY. CONSULT THE APPROPRIATE STANDARDS AND FLANGE MANUFACTURERS FOR CRITICAL DIMENSIONS AND RATINGS.

WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION

Lynch Products Can Be Modified to Suit Your Application

Phone: 1 (888) 626-4365 or +1 (905) 363-2400 Fax: 1 (800) 263-5807 www.lynch.ca sales@lynch.ca

General Port Specifications

SAE PORTS	Per ISO 11926-1 & SAE J1926-1						
	THREAD	D1 (min)	D2 -0.002	L2 $+0.015$	L3 (min)	L4 (min)	Z $\pm 1^\circ$
-4	7/16" - 20	0.827	0.488	0.094	0.453	0.547	12
-6	9/16" - 18	0.984	0.614	0.098	0.500	0.609	12
-8	3/4" - 16	1.181	0.811	0.098	0.563	0.688	15
-10	7/8" - 14	1.339	0.941	0.098	0.657	0.781	15
-12	1 1/16" - 12	1.614	1.150	0.130	0.750	0.906	15
-16	1 5/16" - 12	1.929	1.398	0.130	0.750	0.906	15
-20	1 5/8" - 12	2.283	1.713	0.130	0.750	0.906	15
-24	1 7/8" - 12	2.559	1.961	0.130	0.750	0.906	15
-32	2 1/2" - 12	3.465	2.587	0.130	0.750	0.906	15

NPT PORTS	Per SAE J476 & ANSI B1.20.3			
	THREAD	D2	L3	L4
1/16"	1/16" - 27	0.32	0.31	0.38
1/8"	1/8" - 27	0.42	0.31	0.38
1/4"	1/4" - 18	0.55	0.44	0.47
3/8"	3/8" - 18	0.69	0.47	0.53
1/2"	1/2" - 14	0.85	0.59	0.69
3/4"	3/4" - 14	1.06	0.63	0.75
1"	1" - 11.5	1.34	0.75	0.84
1 1/4"	1 1/4" - 11.5	1.68	0.78	0.84
1 1/2"	1 1/2" - 11.5	1.92	0.81	0.88
2"	2" - 11.5	2.39	0.81	0.91

BSPP PORTS	Per ISO 1179-1 & BS 2779				
	THREAD	D1 (min)	D2	L3 (min)	L4 (min)
1/4"	G 1/4" - 19	0.846	0.524	0.472	0.625
3/8"	G 3/8" - 19	1.004	0.661	0.472	0.625
1/2"	G 1/2" - 14	1.181	0.835	0.551	0.748
3/4"	G 3/4" - 14	1.437	1.047	0.630	0.906
1"	G 1" - 11	1.811	1.319	0.709	1.024
1 1/4"	G 1 1/4" - 11	2.244	1.661	0.787	1.142
1 1/2"	G 1 1/2" - 11	2.500	1.894	0.866	1.142

BSPT PORTS	Per ISO 7			
	THREAD	D2	L3	L4
1/4"	1/4" - 19	0.55	0.44	0.47
3/8"	3/8" - 19	0.69	0.47	0.53
1/2"	1/2" - 14	0.85	0.59	0.69
3/4"	3/4" - 14	1.06	0.63	0.75
1"	1" - 11	1.34	0.75	0.84
1 1/4"	1 1/4" - 11	1.68	0.78	0.84
1 1/2"	1 1/2" - 11	1.92	0.81	0.88

METRIC PORTS	Per ISO 6149-1							
	THREAD	D1 (min)	D2 $+0.004$	D3 (min)	L2 $+0.015$	L3 (min)	L4 (min)	Z $\pm 1^\circ$
M10	M10 x 1.0	0.787	0.437	0.630	0.063	0.393	0.453	12
M14	M14 x 1.5	0.984	0.622	0.827	0.094	0.453	0.551	15
M18	M18 x 1.5	1.181	0.780	1.024	0.094	0.571	0.669	15
M22	M22 x 1.5	1.339	0.937	1.142	0.094	0.610	0.709	15
M27	M27 x 2.0	1.575	1.157	1.339	0.125	0.748	0.866	15
M33	M33 x 2.0	1.929	1.393	1.693	0.125	0.748	0.866	15
M42	M42 x 2.0	2.362	1.750	2.047	0.125	0.768	0.886	15
M48	M48 x 2.0	2.598	1.984	2.244	0.125	0.866	0.984	15

Notes:

- 1) For Metric Ports, D1 Spotface for ports with identification ridge as shown by dimension D3.
- 2) For Metric Ports, when identification ridge is not machined, port must be stamped as "Metric" or component must be stamped "ISO 6149-1 Metric"
- 3) For all Port Types, L4 tap drill depth for L3 full thread depth requires the use of a bottoming tap.

THIS DATA IS FOR REFERENCE ONLY. CONSULT THE APPROPRIATE STANDARDS FOR CRITICAL DIMENSIONS AND RATINGS.

WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION

Lynch Products Can Be Modified to Suit Your Application

Phone: 1 (888) 626-4365 or +1 (905) 363-2400 Fax: 1 (800) 263-5807 www.lynch.ca sales@lynch.ca