


## D05HE High Flow Parallel Circuit Manifold with X&Y

### "DUAL TANKS"

(See Page 1.99.01 for Relief Cartridges)

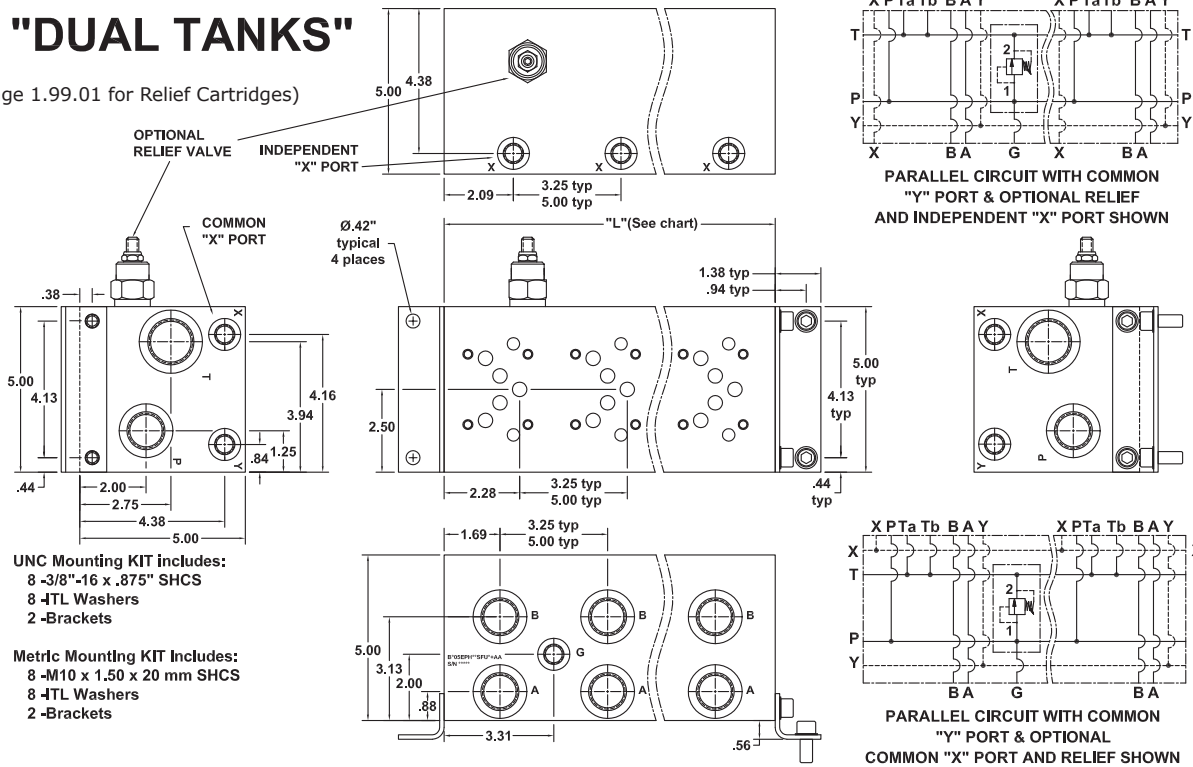

**UNC Mounting KIT includes:**  
8 -3/8"-16 x .875" SHCS  
8 -JTL Washers  
2 -Brackets


**Metric Mounting KIT Includes:**  
8 -M10 x 1.50 x 20 mm SHCS  
8 -JTL Washers  
2 -Brackets

| No. of Stations          | 1    | 1*   | 2    | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | 11    | 12    | 13    | 14    | 15    | 16    |
|--------------------------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Dim. "L", 3.25" spacing  | 3.50 | 4.50 | 6.75 | 10.00 | 13.25 | 16.50 | 19.75 | 23.00 | 26.25 | 29.50 | 32.75 | 36.00 | 39.25 | 42.50 | 45.75 | 49.00 | 52.25 |
| est. weight in lb.- alum | 9    | 11   | 16   | 23    | 31    | 38    | 45    | 53    | 60    | 67    | 74    | 82    | 89    | 96    | 104   | 111   | 118   |
| est. weight in lb.- iron | 22   | 28   | 42   | 62    | 81    | 101   | 121   | 140   | 160   | 180   | 200   | 219   | 239   | 259   | 279   | 298   | 318   |
| Dim. "L", 5.00" spacing  | -    | -    | 8.50 | 13.50 | 18.50 | 23.50 | 28.50 | 33.50 | 38.50 | 43.50 | 48.50 | 53.50 | 58.50 | 63.50 | 68.50 | -     | -     |
| est. weight in lb.- alum | -    | -    | 20   | 31    | 42    | 54    | 65    | 76    | 87    | 99    | 110   | 121   | 132   | 144   | 155   | -     | -     |
| est. weight in lb.- iron | -    | -    | 52   | 83    | 113   | 144   | 174   | 204   | 235   | 265   | 295   | 326   | 356   | 387   | 417   | -     | -     |

\* DIMENSIONS FOR 1 STATION WITH RELIEF CAVITY & GAUGE PORT  
NO GAUGE PORT SUPPLIED WITH SINGLE STATION MANIFOLD  
SHADED AREA AVAILABLE ON SPECIAL ORDER ONLY

### PART NUMBER SYSTEM

Aluminum D05HE with 3.25" Spacing, Common Y & SAE porting example: **BA05EPH\*\*SFUABAA**

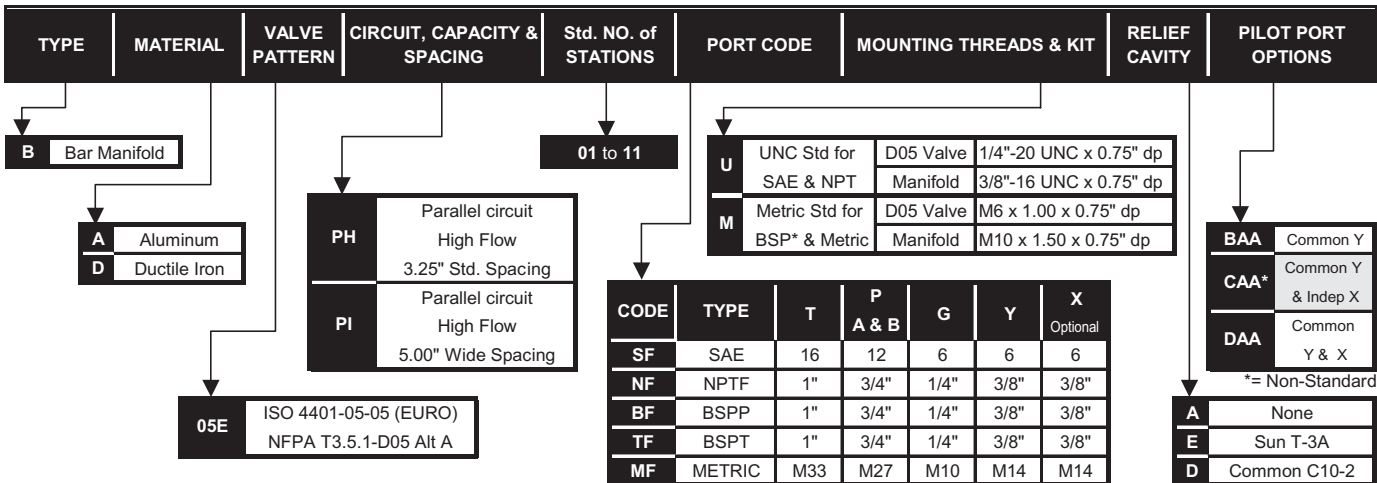

WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION

Lynch Products Can Be Modified to Suit Your Application