Lynch
Manifolds & Valve Packs

D03 Subplate - Nominal 3/4”

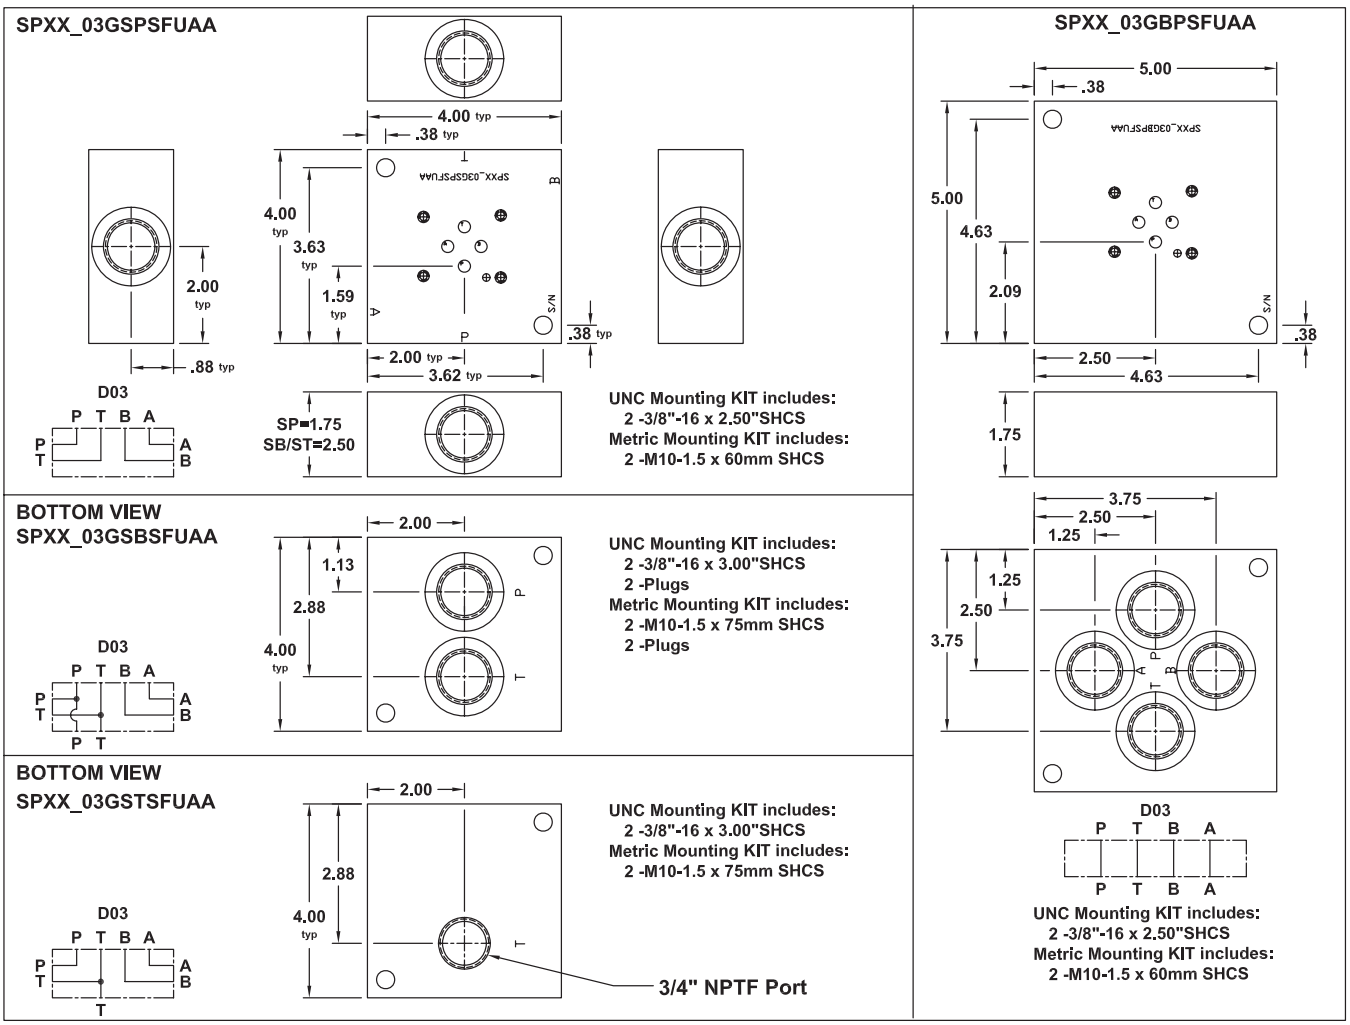

PART NUMBER SYSTEM

Aluminum D03 Side Ported Subplate with SAE 12 Ports Example: **SPXXA03GSPSFUAA**

TYPE	MATERIAL	VALVE PATTERN	PORTING STYLE	PORT CODE	MOUNTING THREADS & KIT	PILOT PORT OPTIONS

TYPE

SPXX	Subplate

MATERIAL

A	Aluminum
D	Ductile Iron

VALVE PATTERN

03G	ISO 4401-03-02 NFPA T3.5.1-D03

PORTING STYLE

BP	Bottom Ported Only
SB	Side Ported with Bottom P & T Ports
SP	Side Ported only
ST	Side Ported with 3/4" NPTF "T" Port on Bottom only

PORT CODE

CODE	TYPE	P, T, A and B
SF	SAE	12
NF	NPTF	3/4"
BF	BSPP	3/4"
TF	BSPT	3/4"
MF	METRIC	M27

MOUNTING THREADS & KIT

U	UNC Std for SAE & NPT	D03 Valve Subplate	10-24 UNC x .63 dp 3/8"-16 UNC SHCS
M	Metric Std for BSP* & Metric	D03 Valve Subplate	M5 x 0.80 x .63 dp M10 x 1.50 SHCS

PILOT PORT OPTIONS

AA	None

WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION